
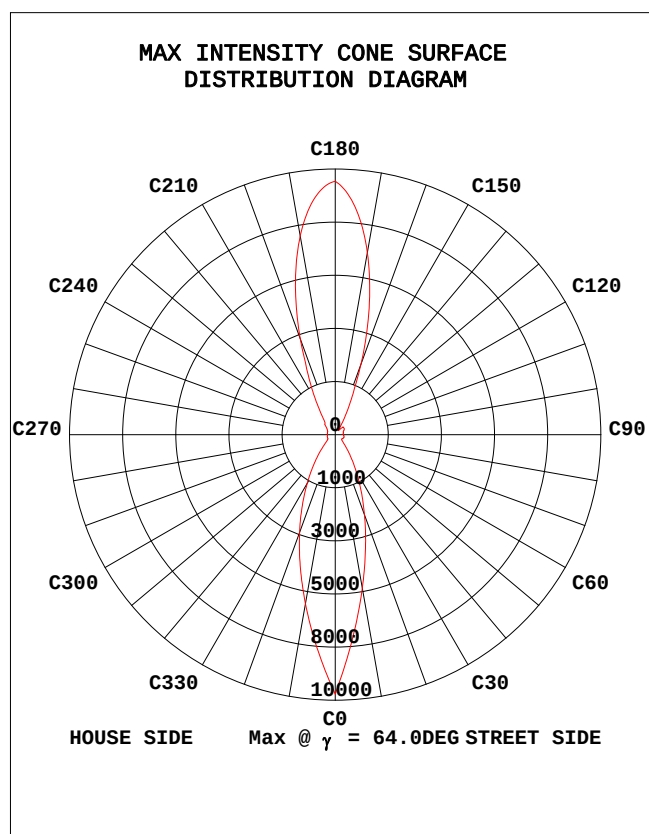


## STREETLIGHT PHOTOMETRIC TEST REPORT

|                                                          |          |                     |
|----------------------------------------------------------|----------|---------------------|
| Test:U:0V I:0A P:0W PF:0 Freq:0Hz Lamp Flux:21364.5x1 lm |          |                     |
| NAME: All-in-one solar street light                      | TYPE:LED | WEIGHT:N/A          |
| SPEC.:N/A                                                | DIM.:    | SERIAL No.:N/A      |
| MFR.:                                                    | SUR.:    | Shielding Angle:N/A |

| DATA OF LAMP     |         | PHOTOMETRIC DATA      |        |                  |         |
|------------------|---------|-----------------------|--------|------------------|---------|
| MODEL            | 120W    | I <sub>max</sub> (cd) | 9995   | η street_up(%)   | 0.1     |
| NOMINAL POWER(W) | 120     | LOR(%)                | 100.0  | η street_down(%) | 57.8    |
| RATED VOLTAGE(V) |         | TOTAL FLUX(lm)        | 21365  | η house_up(%)    | 0.1     |
| NOMINAL FLUX(lm) | 21364.5 | MAXIMUM @(C,γ )       | 0,64.0 | η house_down(%)  | 42.0    |
| LAMPS INSIDE     | 1       | η up(%)               | 0.2    | 76 FLASHAREA(m2) | 0.05000 |
| TEST VOLTAGE(V)  |         | η down(%)             | 99.8   | SLI              | 19.612  |

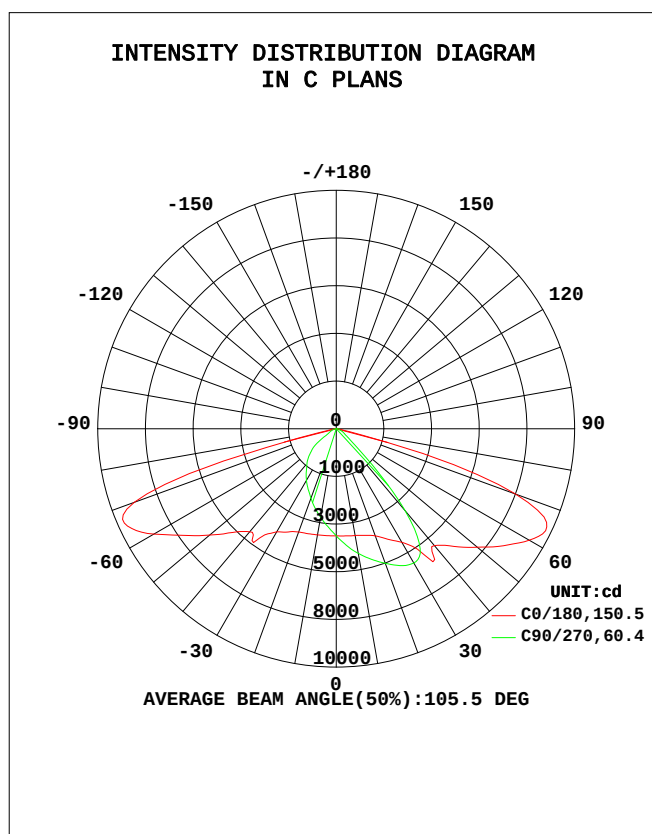


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:24.9DEG  
Operators:Link Chai  
Test Date:2022-01-14

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE G0-R5000\_V2 SYSTEM V2.0.362  
Humidity:60%  
Test Distance:26.000m [K=1.4587]  
Remarks:

## STREETLIGHT ISOCANDELA DIAGRAM

|                                                          |          |                     |
|----------------------------------------------------------|----------|---------------------|
| Test:U:0V I:0A P:0W PF:0 Freq:0Hz Lamp Flux:21364.5x1 lm |          |                     |
| NAME: All-in-one solar street light                      | TYPE:LED | WEIGHT:N/A          |
| SPEC.:N/A                                                | DIM.:    | SERIAL No.:N/A      |
| MFR.:                                                    | SUR.:    | Shielding Angle:N/A |

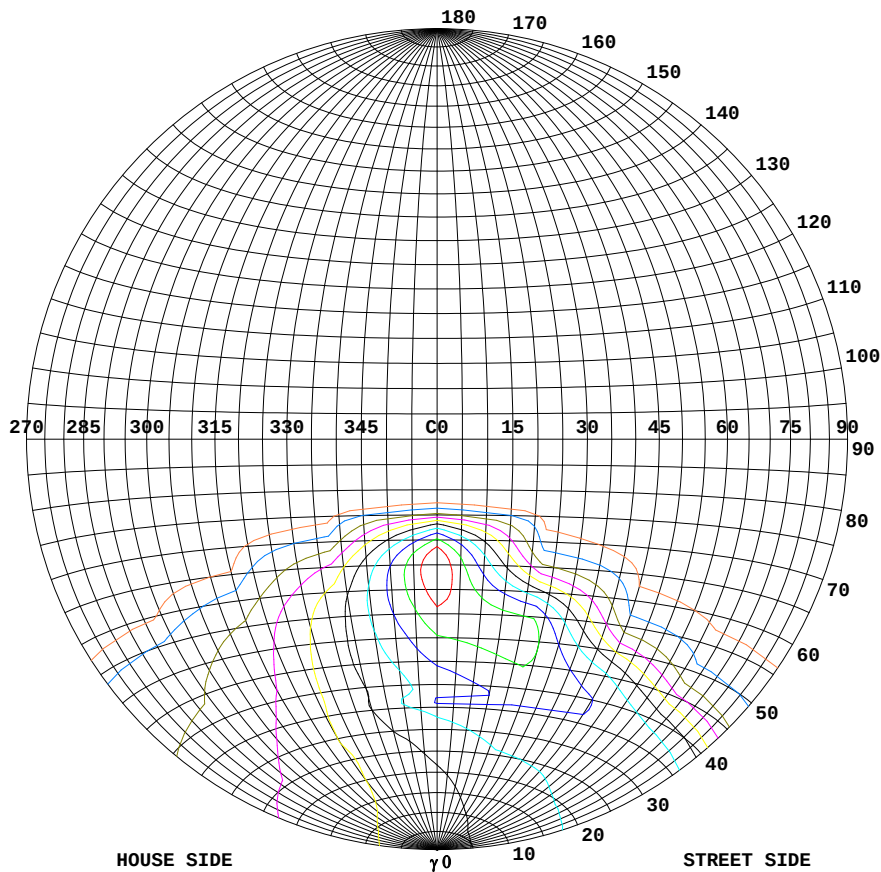

### Classification:


**IES:**Type I - Short  
**CIE:**Narrow - Intermediate  
**IES:**Cut-off  
**CIE:**Full cut-off  
 Max.At80:49.67cd/klm  
 Max.At90:2.581cd/klm  
 Max.80-90:26.67cd/klm

| ISOCANDELA DIAGRAM |      |
|--------------------|------|
| UNIT               | cd   |
| Imax=100%          | 9995 |
| 90%                | 9056 |
| 80%                | 8516 |
| 70%                | 7077 |
| 60%                | 6137 |
| 50%                | 4198 |
| 40%                | 3758 |
| 30%                | 3319 |
| 20%                | 1079 |
| 10%                | 940  |
| 5%                 | 580  |

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.9DEG  
 Operators:Link Chai  
 Test Date:2022-01-14

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE G0-R5000\_V2 SYSTEM V2.0.362  
 Humidity:60%  
 Test Distance:26.000m [K=1.4587]  
 Remarks:

COEFFICIENT OF UTILIZATION CURVE  
AND ISOLUX DIAGRAM

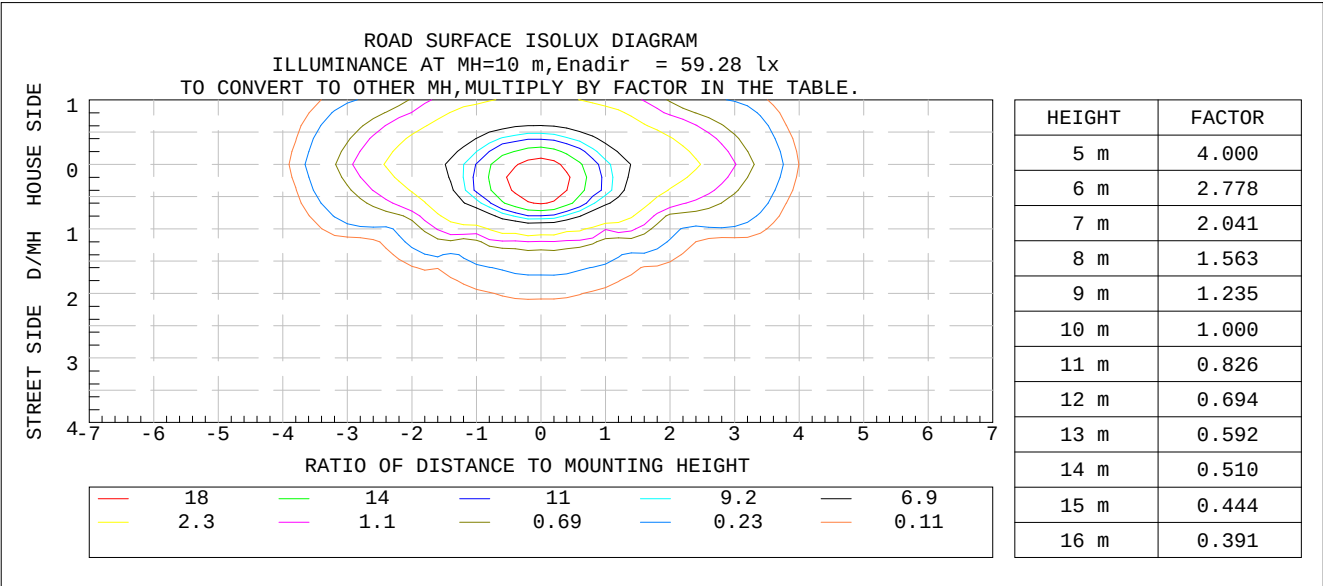

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 24.9DEG  
Operators: Link Chai  
Test Date: 2022-01-14

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE G0-R5000\_V2 SYSTEM V2.0.362  
Humidity: 60%  
Test Distance: 26.000m [K=1.4587]  
Remarks:

### ZONAL FLUX DIAGRAM

|                                                          |          |                     |
|----------------------------------------------------------|----------|---------------------|
| Test:U:0V I:0A P:0W PF:0 Freq:0Hz Lamp Flux:21364.5x1 lm |          |                     |
| NAME: All-in-one solar street light                      | TYPE:LED | WEIGHT:N/A          |
| SPEC.:N/A                                                | DIM.:    | SERIAL No.:N/A      |
| MFR.:                                                    | SUR.:    | Shielding Angle:N/A |


| γ   | C0                    | C45    | C90    | C135   | C180  | C225   | C270   | C315   | γ       | Φ zone  | Φ total | %lum, lamp |
|-----|-----------------------|--------|--------|--------|-------|--------|--------|--------|---------|---------|---------|------------|
| 10  | 6048                  | 6290   | 6388   | 6284   | 6035  | 5788   | 5698   | 5813   | 0- 10   | 194.1   | 194.1   | 2.73,2.73  |
| 20  | 5153                  | 5551   | 5700   | 5524   | 5076  | 5592   | 5396   | 4654   | 10- 20  | 584.8   | 778.9   | 10.9,10.9  |
| 30  | 5473                  | 5850   | 2928   | 5754   | 4248  | 3422   | 3125   | 3520   | 20- 30  | 985.5   | 1764    | 24.8,24.8  |
| 40  | 5880                  | 3082   | 5026   | 2860   | 2539  | 2251   | 864.0  | 2358   | 30- 40  | 1372    | 3136    | 44,44      |
| 50  | 3479                  | 1731   | 401.6  | 1408   | 3120  | 1038   | 581.3  | 1126   | 40- 50  | 1458    | 4595    | 64.5,64.5  |
| 60  | 4207                  | 289.8  | 175.9  | 285.4  | 3975  | 555.2  | 161.4  | 595.6  | 50- 60  | 1276    | 5871    | 82.5,82.5  |
| 70  | 3592                  | 136.0  | 77.05  | 125.6  | 4052  | 123.0  | 89.85  | 134.1  | 60- 70  | 904.9   | 6776    | 95.2,95.2  |
| 80  | 84.81                 | 77.37  | 62.90  | 67.53  | 97.31 | 47.93  | 20.30  | 54.65  | 70- 80  | 302.7   | 7078    | 99.4,99.4  |
| 90  | 5.589                 | 5.476  | 5.736  | 4.117  | 3.671 | 0      | 0      | 0.4616 | 80- 90  | 29.13   | 7108    | 99.8,99.8  |
| 100 | 4.914                 | 0.1315 | 0      | 0.0942 | 2.846 | 0      | 0      | 0      | 90-100  | 0.9792  | 7109    | 99.8,99.8  |
| 110 | 6.660                 | 0.0939 | 0      | 0.0942 | 4.540 | 0.8500 | 0.2082 | 0.2832 | 100-110 | 1.090   | 7110    | 99.8,99.8  |
| 120 | 7.188                 | 0.0939 | 0      | 0.0942 | 4.590 | 3.762  | 1.695  | 1.545  | 110-120 | 1.707   | 7111    | 99.9,99.9  |
| 130 | 6.246                 | 0.8339 | 0.0938 | 0.1859 | 3.494 | 5.079  | 2.260  | 2.448  | 120-130 | 1.960   | 7113    | 99.9,99.9  |
| 140 | 4.636                 | 1.561  | 0.4690 | 0.6579 | 3.254 | 5.330  | 3.572  | 3.391  | 130-140 | 2.039   | 7115    | 99.9,99.9  |
| 150 | 4.539                 | 2.051  | 1.500  | 1.695  | 3.596 | 5.403  | 4.036  | 4.388  | 140-150 | 1.968   | 7117    | 100,100    |
| 160 | 4.540                 | 2.817  | 2.158  | 2.146  | 4.258 | 5.476  | 4.647  | 4.831  | 150-160 | 1.663   | 7119    | 100,100    |
| 170 | 4.699                 | 4.309  | 3.277  | 3.031  | 4.731 | 5.532  | 4.605  | 4.890  | 160-170 | 1.105   | 7120    | 100,100    |
| 180 | 5.013                 | 5.355  | 4.033  | 3.767  | 5.013 | 5.543  | 4.406  | 4.519  | 170-180 | 0.4205  | 7120    | 100,100    |
| DEG | LUMINOUS INTENSITY:cd |        |        |        |       |        |        |        |         | UNIT:lm |         |            |

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:24.9DEG  
Operators:Link Chai  
Test Date:2022-01-14

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE G0-R5000\_V2 SYSTEM V2.0.362  
Humidity:60%  
Test Distance:26.000m [K=1.4587]  
Remarks:

## ISOCANDELA DIAGRAM


|                                                          |          |                     |
|----------------------------------------------------------|----------|---------------------|
| Test:U:0V I:0A P:0W PF:0 Freq:0Hz Lamp Flux:21364.5x1 lm |          |                     |
| NAME: All-in-one solar street light                      | TYPE:LED | WEIGHT:N/A          |
| SPEC.:N/A                                                | DIM.:    | SERIAL No.:N/A      |
| MFR.:                                                    | SUR.:    | Shielding Angle:N/A |

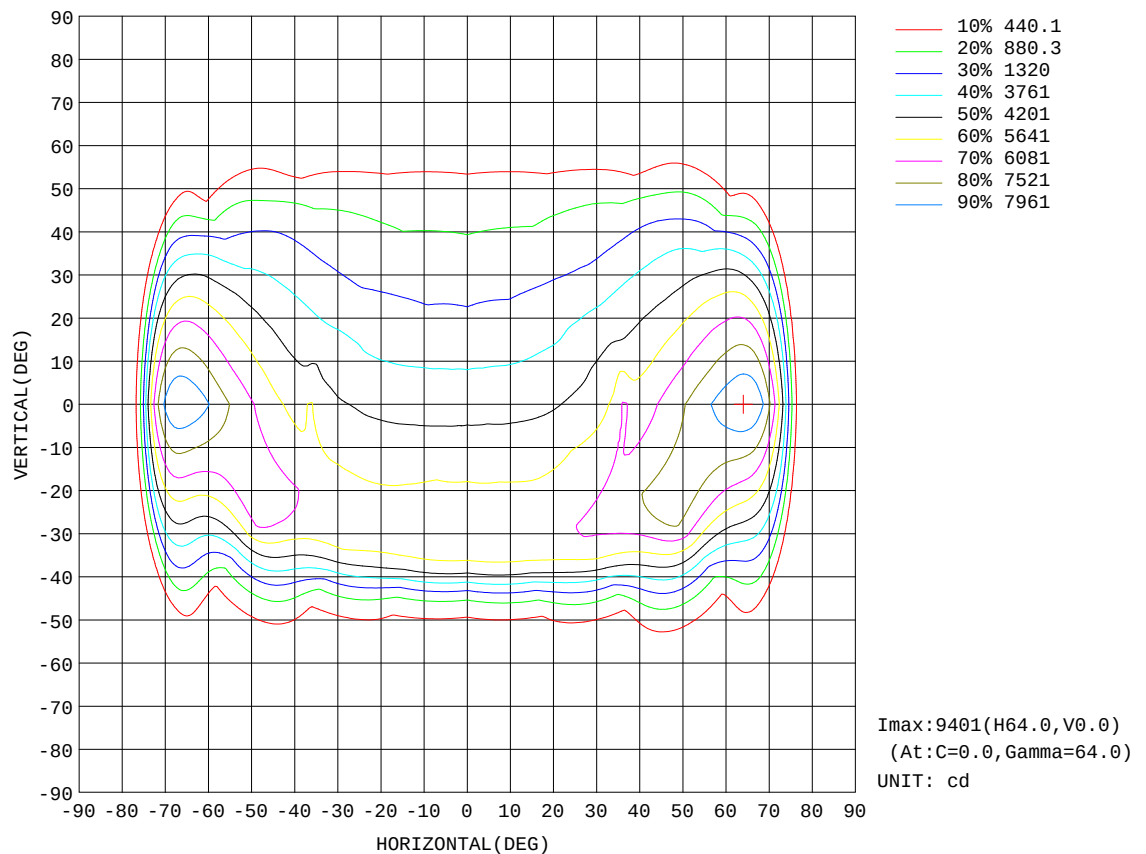

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:24.9DEG  
Operators:Link Chai  
Test Date:2022-01-14

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE G0-R5000\_V2 SYSTEM V2.0.362  
Humidity:60%  
Test Distance:26.000m [K=1.4587]  
Remarks:

## Planar Illuminance Curve

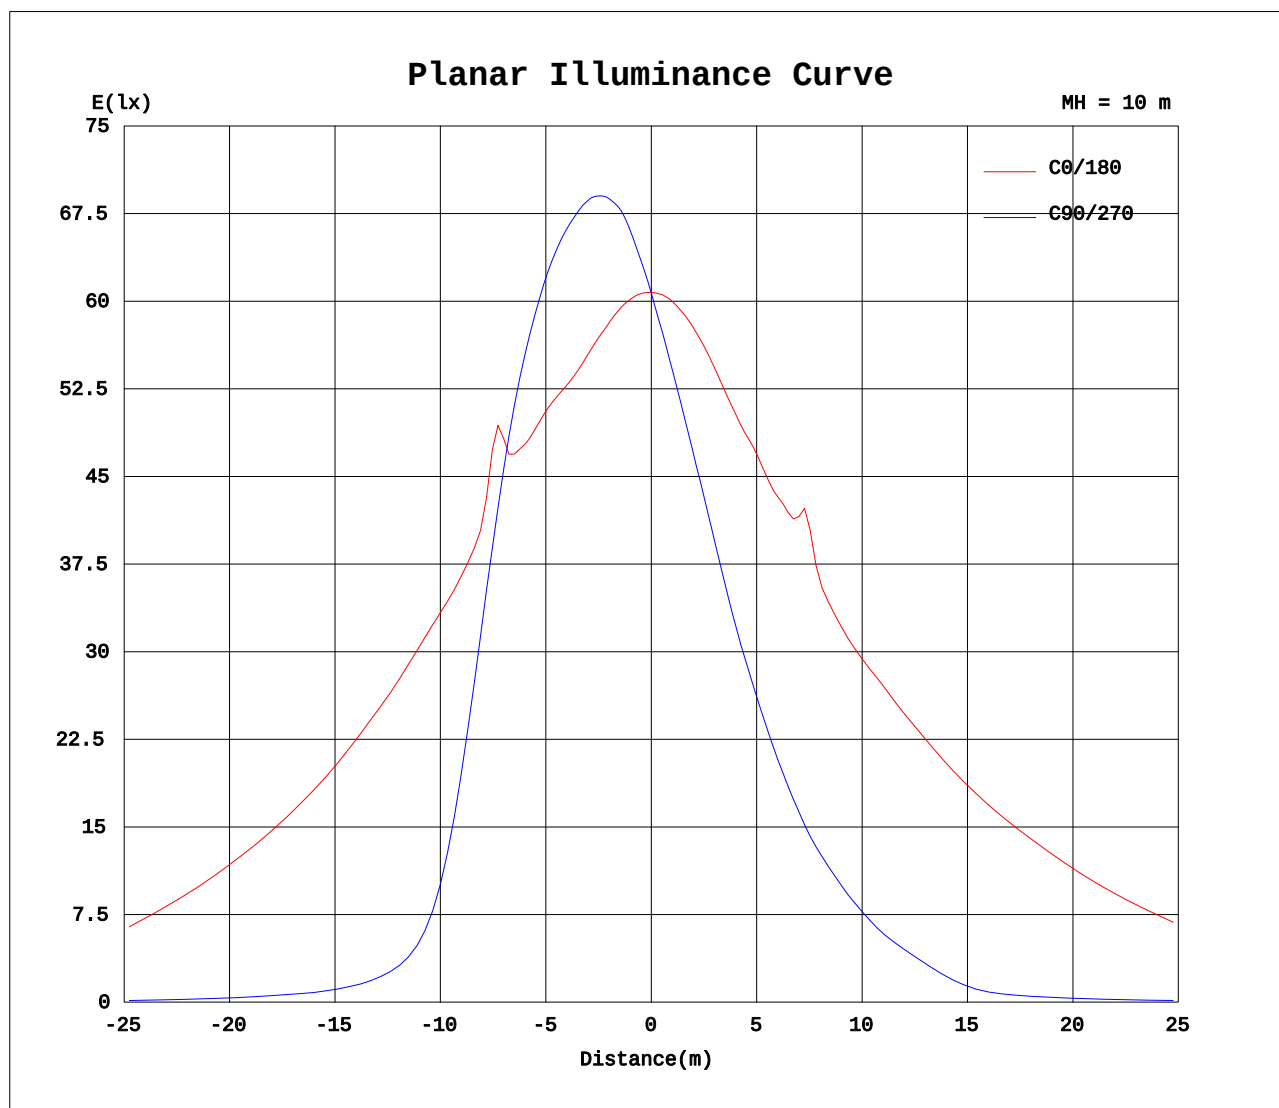


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 24.9DEG  
Operators: Link Chai  
Test Date: 2022-01-14

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE G0-R5000\_V2 SYSTEM V2.0.362  
Humidity: 60%  
Test Distance: 26.000m [K=1.4587]  
Remarks:

## LCS REPORT

|                                                          |          |                     |
|----------------------------------------------------------|----------|---------------------|
| Test:U:0V I:0A P:0W PF:0 Freq:0Hz Lamp Flux:21364.5x1 lm |          |                     |
| NAME: All-in-one solar street light                      | TYPE:LED | WEIGHT:N/A          |
| SPEC.:N/A                                                | DIM.:    | SERIAL No.:N/A      |
| MFR.:                                                    | SUR.:    | Shielding Angle:N/A |

### LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

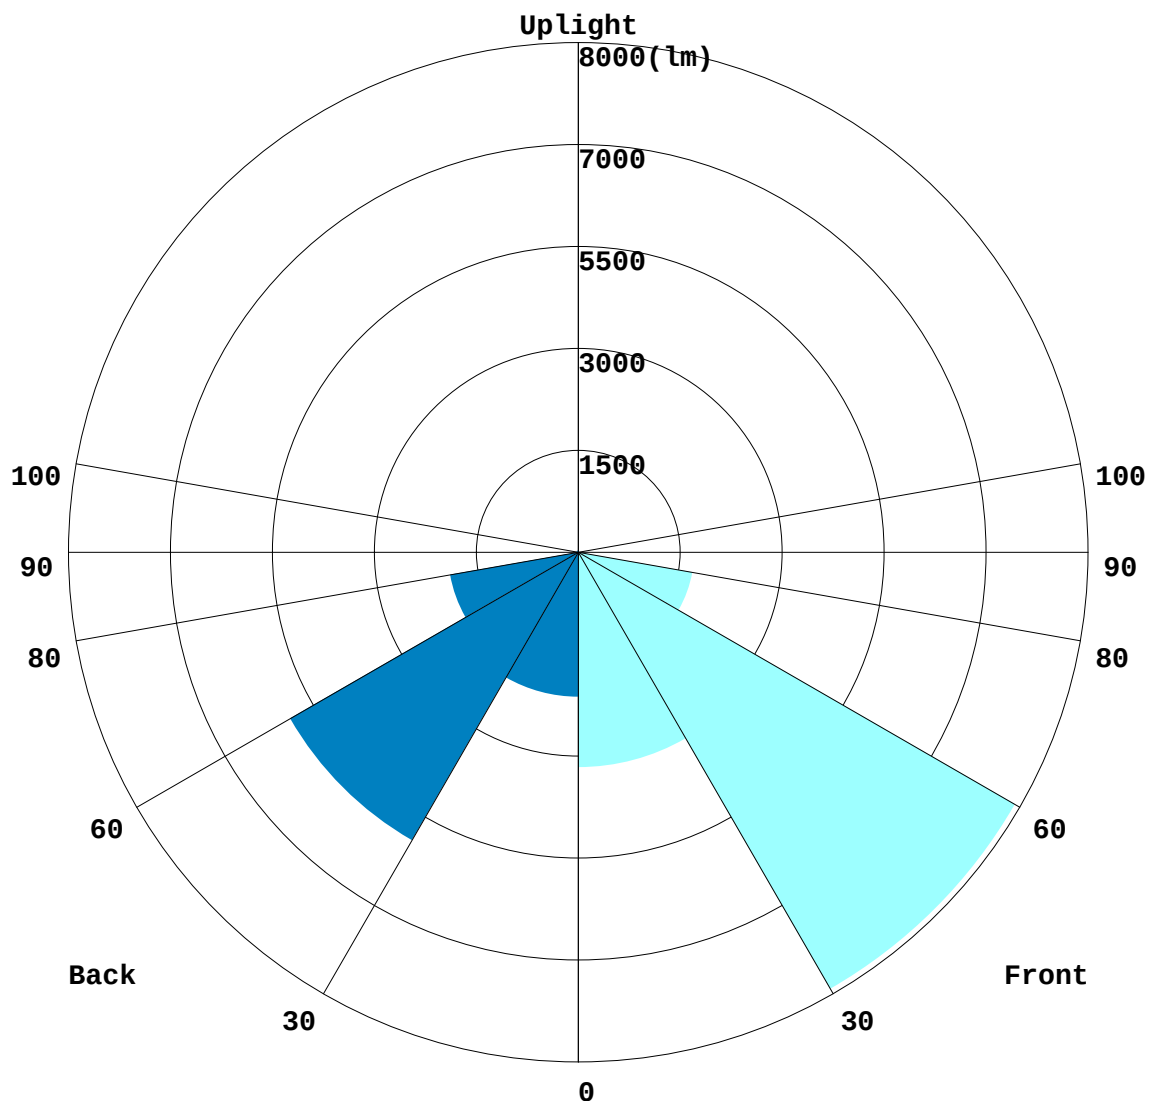

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:24.9DEG  
Operators:Link Chai  
Test Date:2022-01-14

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE G0-R5000\_V2 SYSTEM V2.0.362  
Humidity:60%  
Test Distance:26.000m [K=1.4587]  
Remarks:

## BUG REPORT

|                                                          |          |                     |
|----------------------------------------------------------|----------|---------------------|
| Test:U:0V I:0A P:0W PF:0 Freq:0Hz Lamp Flux:21364.5x1 lm |          |                     |
| NAME: All-in-one solar street light                      | TYPE:LED | WEIGHT:N/A          |
| SPEC.:N/A                                                | DIM.:    | SERIAL No.:N/A      |
| MFR.:                                                    | SUR.:    | Shielding Angle:N/A |

### IESNA Luminaire Flux Distribution Table:

| Zone                         | Lumens | Luminaire % |
|------------------------------|--------|-------------|
| FL - Front-Low(0-30)         | 3858.1 | 14.8        |
| FM - Front-Medium(30-60)     | 5474.4 | 34.8        |
| FH - Front-High(60-80)       | 969.03 | 8.0         |
| FVH - Front-Very High(80-90) | 18.27  | 0.3         |
| Total Forward Light          | 9121.9 | 57.9        |

|                             |        |      |
|-----------------------------|--------|------|
| BL - Back-Low(0-30)         | 909.20 | 10.0 |
| BM - Back-Medium(30-60)     | 2632.1 | 22.9 |
| BH - Back-High(60-80)       | 638.49 | 9.0  |
| BVH - Back-Very High(80-90) | 10.859 | 0.2  |
| Total Back Light            | 5998.5 | 42.1 |

|                            |         |     |
|----------------------------|---------|-----|
| UL - Uplight-Low(90-100)   | 0.97924 | 0.0 |
| UH - Uplight-High(100-180) | 11.952  | 0.2 |
| Total Up Light             | 12.931  | 0.2 |

|                           |          |
|---------------------------|----------|
| BUG(Back,Up,Glare) Rating | B2-U2-G2 |
|---------------------------|----------|

| Zone        | Downward Lumens | Upward Lumens | Total Lumens |
|-------------|-----------------|---------------|--------------|
| House Side  | 5090.7          | 7.848         | 5098.5       |
| Street Side | 9116.8          | 5.0835        | 9121.9       |


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:24.9DEG  
Operators:Link Chai  
Test Date:2022-01-14

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE G0-R5000\_V2 SYSTEM V2.0.362  
Humidity:60%  
Test Distance:26.000m [K=1.4587]  
Remarks:

## ROAD ISOCANDELA REPORT

|                                                          |          |                     |
|----------------------------------------------------------|----------|---------------------|
| Test:U:0V I:0A P:0W PF:0 Freq:0Hz Lamp Flux:21364.5x1 lm |          |                     |
| NAME: All-in-one solar street light                      | TYPE:LED | WEIGHT:N/A          |
| SPEC.:N/A                                                | DIM.:    | SERIAL No.:N/A      |
| MFR.:                                                    | SUR.:    | Shielding Angle:N/A |

ROAD SURFACE ISOCANDELA DIAGRAM

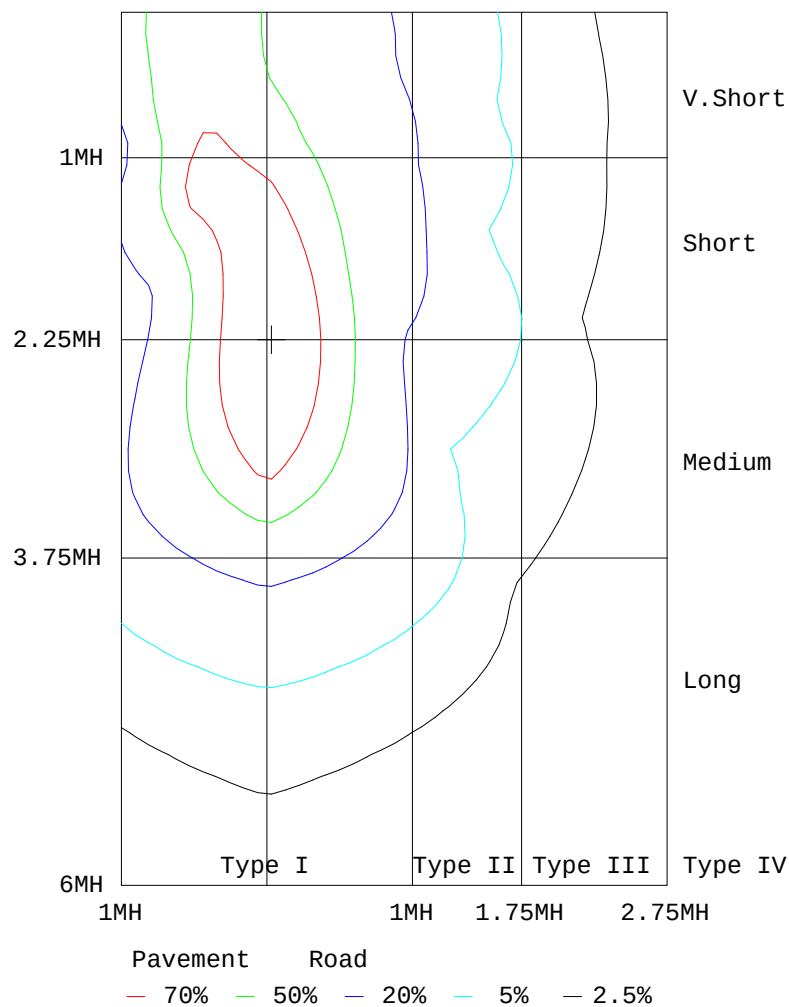

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.9DEG  
 Operators:Link Chai  
 Test Date:2022-01-14

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE G0-R5000\_V2 SYSTEM V2.0.362  
 Humidity:60%  
 Test Distance:26.000m [K=1.4587]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

|                                                          |  |  |  |  |  |  |  |  |          |  |  |  |  |  |                     |  |  |
|----------------------------------------------------------|--|--|--|--|--|--|--|--|----------|--|--|--|--|--|---------------------|--|--|
| Test:U:0V I:0A P:0W PF:0 Freq:0Hz Lamp Flux:21364.5x1 lm |  |  |  |  |  |  |  |  |          |  |  |  |  |  |                     |  |  |
| NAME: All-in-one solar street light                      |  |  |  |  |  |  |  |  | TYPE:LED |  |  |  |  |  | WEIGHT:N/A          |  |  |
| SPEC.:N/A                                                |  |  |  |  |  |  |  |  | DIM.:    |  |  |  |  |  | SERIAL No.:N/A      |  |  |
| MFR.:                                                    |  |  |  |  |  |  |  |  | SUR.:    |  |  |  |  |  | Shielding Angle:N/A |  |  |

Table--1

UNIT: cd

| C(DEC)<br>γ (DEC) | 0    | 22.5 | 45   | 67.5 | 90   | 112.5 | 135  | 157.5 | 180  | 202.5 | 225  | 247.5 | 270  | 292.5 | 315  | 337.5 |  |  |  |
|-------------------|------|------|------|------|------|-------|------|-------|------|-------|------|-------|------|-------|------|-------|--|--|--|
| 0                 | 9023 | 8023 | 9023 | 9023 | 9023 | 9023  | 9023 | 9023  | 9023 | 9023  | 9023 | 9023  | 8023 | 8023  | 7023 | 5023  |  |  |  |
| 5                 | 2031 | 2096 | 2157 | 2191 | 2207 | 5188  | 9146 | 2091  | 5026 | 1958  | 1902 | 4867  | 1852 | 1869  | 3906 | 1965  |  |  |  |
| 10                | 2048 | 2174 | 2290 | 6360 | 2388 | 2364  | 2284 | 5167  | 2035 | 5897  | 5788 | 1723  | 1698 | 1734  | 1813 | 5921  |  |  |  |
| 15                | 4083 | 8271 | 9425 | 2505 | 5551 | 2524  | 5411 | 5246  | 5052 | 1848  | 5682 | 1583  | 1551 | 1603  | 7719 | 5894  |  |  |  |
| 20                | 2153 | 2415 | 2551 | 5657 | 2700 | 5677  | 2524 | 2347  | 4076 | 5808  | 1592 | 4443  | 8396 | 1475  | 1654 | 1897  |  |  |  |
| 25                | 4300 | 2592 | 9675 | 2789 | 2850 | 2798  | 2628 | 2463  | 2149 | 9797  | 1508 | 9311  | 1259 | 8346  | 5591 | 5918  |  |  |  |
| 30                | 2473 | 4791 | 2850 | 2902 | 2928 | 9886  | 5754 | 5576  | 4248 | 1848  | 5422 | 1188  | 8125 | 5218  | 1520 | 2069  |  |  |  |
| 35                | 2923 | 3014 | 3029 | 2884 | 5762 | 5825  | 9865 | 9708  | 2518 | 9865  | 9333 | 9062  | 988  | 8090  | 1438 | 2114  |  |  |  |
| 40                | 2880 | 8242 | 3082 | 9438 | 9026 | 2302  | 2860 | 2919  | 2539 | 1875  | 1251 | 930   | 864  | 956   | 3358 | 3123  |  |  |  |
| 45                | 8140 | 3535 | 2721 | 1413 | 951  | 9261  | 2423 | 9205  | 2768 | 1913  | 1150 | 812   | 731  | 844   | 1255 | 2170  |  |  |  |
| 50                | 3499 | 3726 | 3731 | 554  | 402  | 513   | 7408 | 9381  | 3120 | 9913  | 1038 | 677   | 581  | 695   | 3126 | 3164  |  |  |  |
| 55                | 3850 | 3468 | 687  | 280  | 240  | 288   | 559  | 3035  | 9508 | 5851  | 880  | 471   | 343  | 474   | 945  | 2106  |  |  |  |
| 60                | 9207 | 4337 | 290  | 187  | 176  | 188   | 285  | 1835  | 9975 | 1638  | 555  | 189   | 161  | 200   | 596  | 1902  |  |  |  |
| 65                | 9384 | 992  | 183  | 143  | 129  | 137   | 171  | 684   | 9348 | 1222  | 209  | 132   | 120  | 134   | 246  | 1415  |  |  |  |
| 70                | 3592 | 306  | 136  | 114  | 77.1 | 107   | 126  | 269   | 4052 | 482   | 123  | 99.4  | 89.9 | 102   | 134  | 593   |  |  |  |
| 75                | 4027 | 157  | 99.1 | 77.4 | 63.1 | 70.5  | 97.3 | 131   | 1378 | 144   | 87.9 | 61.1  | 56.7 | 65.6  | 95.7 | 162   |  |  |  |
| 80                | 84.8 | 83.3 | 77.4 | 47.6 | 62.9 | 44.7  | 67.5 | 69.6  | 97.3 | 70.1  | 47.9 | 27.9  | 20.3 | 31.0  | 54.7 | 76.7  |  |  |  |
| 85                | 35.5 | 38.7 | 35.3 | 29.1 | 35.8 | 25.1  | 28.2 | 29.3  | 36.7 | 26.5  | 11.9 | 6.07  | 0.00 | 6.62  | 14.5 | 33.9  |  |  |  |
| 90                | 5.59 | 7.27 | 5.48 | 5.64 | 5.74 | 5.01  | 4.12 | 3.73  | 3.67 | 2.70  | 0.00 | 0.00  | 0.00 | 0.00  | 0.46 | 4.33  |  |  |  |
| 95                | 3.97 | 1.32 | 0.28 | 0.22 | 0.13 | 0.09  | 0.21 | 0.56  | 1.99 | 0.28  | 0.00 | 0.00  | 0.00 | 0.00  | 0.00 | 0.47  |  |  |  |
| 100               | 4.91 | 1.37 | 0.13 | 0.00 | 0.00 | 0.00  | 0.09 | 0.50  | 2.85 | 0.86  | 0.00 | 0.00  | 0.00 | 0.00  | 0.00 | 0.48  |  |  |  |
| 105               | 6.43 | 1.46 | 0.09 | 0.00 | 0.00 | 0.00  | 0.09 | 0.53  | 4.16 | 2.36  | 0.10 | 0.00  | 0.09 | 0.00  | 0.09 | 1.42  |  |  |  |
| 110               | 6.66 | 1.88 | 0.09 | 0.00 | 0.00 | 0.00  | 0.09 | 0.56  | 4.54 | 3.58  | 0.85 | 0.19  | 0.21 | 0.19  | 0.28 | 2.46  |  |  |  |
| 115               | 6.89 | 2.35 | 0.09 | 0.00 | 0.00 | 0.00  | 0.09 | 0.95  | 4.54 | 4.26  | 2.26 | 1.03  | 0.66 | 0.47  | 0.94 | 3.04  |  |  |  |
| 120               | 7.19 | 2.63 | 0.09 | 0.09 | 0.00 | 0.00  | 0.09 | 1.46  | 4.59 | 4.32  | 3.76 | 1.56  | 1.69 | 1.01  | 1.55 | 3.09  |  |  |  |
| 125               | 7.19 | 2.80 | 0.30 | 0.27 | 0.09 | 0.00  | 0.09 | 1.60  | 3.88 | 4.14  | 4.14 | 1.66  | 2.00 | 1.18  | 1.89 | 3.15  |  |  |  |
| 130               | 6.25 | 2.88 | 0.83 | 0.38 | 0.09 | 0.09  | 0.19 | 1.71  | 3.49 | 4.03  | 5.08 | 3.59  | 2.26 | 2.16  | 2.45 | 3.21  |  |  |  |
| 135               | 5.67 | 2.93 | 1.50 | 0.47 | 0.09 | 0.19  | 0.41 | 1.98  | 3.28 | 4.01  | 5.19 | 4.09  | 3.51 | 2.78  | 2.92 | 3.26  |  |  |  |
| 140               | 4.64 | 2.98 | 1.56 | 0.85 | 0.47 | 0.56  | 0.66 | 2.08  | 3.25 | 3.98  | 5.33 | 4.23  | 3.57 | 3.57  | 3.39 | 3.41  |  |  |  |
| 145               | 4.59 | 3.03 | 1.51 | 1.63 | 1.03 | 0.94  | 1.50 | 2.17  | 3.22 | 4.04  | 5.37 | 5.19  | 3.63 | 5.16  | 4.05 | 3.49  |  |  |  |
| 150               | 4.54 | 3.11 | 2.05 | 1.88 | 1.50 | 1.45  | 1.69 | 2.17  | 3.60 | 4.22  | 5.40 | 5.93  | 4.04 | 5.17  | 4.39 | 3.60  |  |  |  |
| 155               | 4.54 | 3.18 | 2.44 | 2.16 | 1.97 | 1.70  | 1.91 | 2.22  | 3.97 | 4.52  | 5.44 | 5.94  | 4.69 | 4.87  | 4.71 | 3.61  |  |  |  |
| 160               | 4.54 | 3.25 | 2.82 | 2.63 | 2.16 | 1.96  | 2.15 | 2.40  | 4.26 | 4.55  | 5.48 | 5.82  | 4.65 | 4.80  | 4.83 | 3.63  |  |  |  |
| 165               | 4.54 | 3.67 | 3.10 | 2.82 | 2.72 | 2.71  | 2.61 | 2.76  | 4.41 | 4.60  | 5.51 | 5.17  | 4.61 | 4.72  | 4.86 | 3.65  |  |  |  |
| 170               | 4.70 | 4.48 | 4.31 | 3.38 | 3.28 | 3.18  | 3.03 | 3.14  | 4.73 | 4.80  | 5.53 | 5.17  | 4.61 | 4.66  | 4.89 | 3.66  |  |  |  |
| 175               | 4.92 | 5.08 | 4.79 | 4.33 | 3.75 | 4.30  | 3.39 | 3.50  | 4.93 | 4.94  | 5.54 | 5.17  | 4.60 | 4.60  | 4.71 | 3.68  |  |  |  |
| 180               | 5.01 | 5.55 | 5.35 | 4.42 | 4.03 | 4.40  | 3.77 | 3.69  | 5.01 | 4.99  | 5.54 | 5.17  | 4.41 | 4.12  | 4.52 | 3.59  |  |  |  |

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:24.9DEG  
Operators:Link Chai  
Test Date:2022-01-14

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE G0-R5000\_V2 SYSTEM V2.0.362  
Humidity:60%  
Test Distance:26.000m [K=1.4587]  
Remarks: